


Anvil™
(Owen™ Type)

SCL

WIDE REHANDLING CLAMSHELL BUCKETS

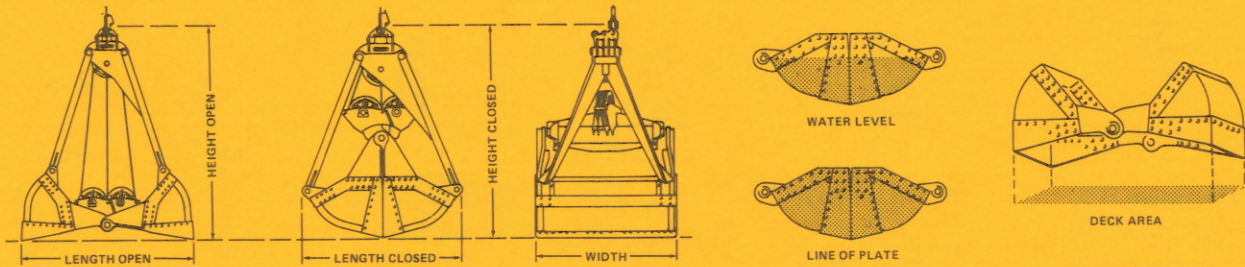

SPECIFICATIONS

SIZE NUMBER		648	52	56	60	63	66	69	71	76
RATING – CU. YDS.		3/4	1	1-1/4	1-1/2	1-3/4	2	2-1/4	2-1/2	3
CAPACITY CU. FT.	Water Level	16.0	18.0	23.5	28.6	32.7	36.5	41.2	46.3	57.3
	Line of Plate	21.6	28.4	35.4	42.5	49.6	56.7	63.8	70.9	87.2
DECK AREA – SQ. FT.		24.0	29.6	36.5	39.6	42.9	46.8	51.0	55.5	61.4
DIMENSIONS	Width Overall	4'2"	4'6"	4'11"	5'2"	5'5"	5'8"	6'0"	6'2"	6'7"
	Length Open	5'9"	6'7"	7'5"	7'8"	7'11"	8'3"	8'6"	9'0"	9'6"
	Length Closed	5'0"	5'6"	5'10"	6'1"	6'4"	6'7"	6'11"	7'3"	7'9"
	Height Open	7'2"	8'3"	8'9"	9'5"	9'8"	10'2"	10'6"	10'7"	11'4"
	Height Closed	6'0"	6'11"	7'3"	7'11"	8'4"	8'8"	8'10"	9'1"	9'6"
SHEAVE – O.D.		12"	14"	14"	16"	16"	18"	18"	18"	20"
ROPE	Diameter	5/8"	3/4"	3/4"	3/4"	3/4"	7/8"	7/8"	7/8"	1"
	To Reeve	26'6"	29'2"	29'6"	32'2"	32'8"	35'4"	36'2"	38'0"	41'0"
	To Close	14'0"	16'2"	16'6"	17'6"	18'0"	19'2"	19'10"	21'2"	22'6"
WEIGHT	Bucket with Riders	2,600	3,240	4,090	4,705	5,110	5,475	6,020	6,985	8,345
	Stiffeners	60	75	80	95	100	105	115	125	135
	Total	2,660	3,315	4,170	4,800	5,210	5,580	6,135	7,110	8,480

SPECIFICATIONS

SIZE NUMBER		278	478	684	84	284	490	690	90
RATING – CU. YDS.		3-1/2	4	4-1/2	5	5-1/2	6	6-1/2	7
CAPACITY – CU. FT.	Water Level	69	85	96	105	115	125	134	145
	Line of Plate	96	110	123	137	150	164	177	191
DECK AREA – SQ. FT.		65.3	69.0	80.6	83.7	86.7	92.7	94.0	98.0
DIMENSIONS	Width Overall	6'9"	6'10"	7'4"	7'4"	7'4"	7'10"	7'10"	7'10"
	Length Open	9'8"	10'1"	11'0"	11'5"	11'10"	11'10"	12'2"	12'6"
	Length Closed	7'9"	8'3"	8'7"	8'11"	9'3"	9'6"	9'10"	10'2"
	Height Open	11'7"	11'9"	13'2"	13'4"	13'6"	14'5"	14'6"	14'8"
	Height Closed	9'9"	10'0"	11'3"	11'4"	11'5"	12'4"	12'5"	12'6"
SHEAVE – O.D.		20"	20"	23"	23"	23"	25"	25"	25"
ROPE	Diameter	1"	1"	1-1/8"	1-1/8"	1-1/8"	1-1/4"	1-1/4"	1-1/4"
	To Reeve	41'4"	42'3"	47'7"	48'1"	48'7"	51'11"	52'5"	52'9"
	To Close	22'4"	23'4"	25'8"	25'8"	25'8"	27'8"	28'6"	29'2"
WEIGHT	Bucket with Riders	8,535	9,220	11,420	11,620	11,860	14,720	15,060	15,280
	Stiffeners	170	220	230	240	250	280	280	290
	Total	8,705	9,440	11,650	11,860	12,110	15,000	15,340	15,570

FOR LARGER SIZES
CONSULT FACTORY

Because of normal variances in the material used, the weight of an actual bucket may vary slightly from that listed in the data table.

All moving parts are equipped with button head grease fittings.

ANVIL also makes a lightweight version of this bucket, the type SCX. Under normal conditions, the SCL Bucket will provide the best service; however, if conditions are ideal and the material is light and free-flowing, the SCX Bucket can be used.

Complete information on SCX Buckets is available on request.

ANVIL™ OWEN™ YAUN-WILLIAMS™

attachments

Engineered and marketed by



INTERGY, INC.



Rush & Parker Inc.

26 W. Main St. W. Collingswood Heights, NJ 08059

Phone 877-757-1965 (Toll Free)

Phone 856-456-0081 Fax 856-742-1994

www.rushandparkerinc.com - rushandparkerinc@msn.com