


ILG-B
MODEL



*"Quality
First"*

ILG
MODEL

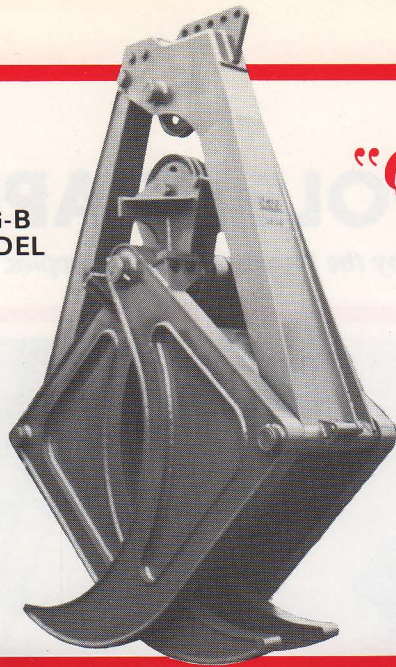

LOG AND POLE GRAPPLES

FOR HANDLING LOGS, POLES, BRIDGE TIMBERS,
RAILROAD TIES, AND OTHER TIMBER PRODUCTS

- Furnished in all types for handling smallest to largest logs on any type of crane or derrick.
- Special P Models for handling treated poles without damage.
- Made of heat treated steel having exceptionally high physical characteristics.
- Efficient—low maintenance.
- Welded construction—combining light weight with rugged strength.
- Heat treated sheaves and hardened fairlead rollers mounted on roller bearings assure longer rope life.

ALL SPECIFICATIONS ARE APPROXIMATE AND ARE SUBJECT TO CHANGE WITHOUT NOTICE

New Model No.	Old Model No.	Area When Tine Points Are Meeting		Overall Height (Open)		Tine Opening		Tine Width		Weight	
		ft ²	m ²	ft/in	mm	ft/in	mm	ft/in	mm	lbs.	kg
ILG-2	ILG-16	2	0.19	6'2"	1880	4'7"	1397	2'0"	610	1,300	590
ILG-3	ILG-18	3	0.28	7'0"	2134	5'2"	1575	2'0"	610	1,650	749
ILG-4	ILG-20	4	0.37	8'4"	2540	5'8"	1727	2'9"	838	2,000	907
ILG-5	ILG-28	5	0.46	8'8"	2642	6'3"	1905	2'9"	838	2,200	998
ILG-6	ILG-30	6	0.56	9'8"	2946	7'1"	2159	3'4"	1016	2,800	1270
ILG-8	ILG-36	8	0.74	10'11"	3327	7'10"	2388	3'4"	1016	3,300	1497
ILG-10	ILG-42	10	0.93	12'2"	3708	8'7"	2616	4'5"	1346	4,600	2087
ILG-15	ILG-54	15	1.39	12'10"	3912	9'3"	2819	4'5"	1346	5,400	2450
ILG-20	ILG-60	20	1.86	13'2"	4013	10'11"	3327	4'5"	1346	6,300	2858
ILG-25	ILG-72	25	2.32	14'4"	4369	11'8"	3556	4'5"	1346	7,300	3312
ILG-20B		20	1.86	15'2"	4623	10'2"	3099	3'0"	914	8,600	3902
ILG-25B		25	2.32	17'4"	5283	12'2"	3708	3'0"	914	9,900	4492
ILG-30B		30	2.79	18'3"	5563	13'7"	4140	3'0"	914	11,500	5218
ILG-35B		35	3.25	19'3"	5867	15'0"	4572	3'6"	1067	13,000	5898
ILG-40B		40	3.72	20'2"	6147	16'5"	5004	3'6"	1067	14,650	6647
ILG-45B		45	4.18	21'1"	6426	17'10"	5436	3'6"	1067	16,200	7350
ILG-50B		50	4.65	22'2"	6756	19'2"	5842	4'0"	1219	17,800	8076
ILG-55B		55	5.12	22'11"	6985	20'0"	6096	4'0"	1219	18,400	8348
ILG-60B		60	5.57	23'8"	7214	20'10"	6350	4'0"	1219	19,000	8621